


Dimensions in mm

STRAIGHT SIDE PLATES - FRENCH SERIES

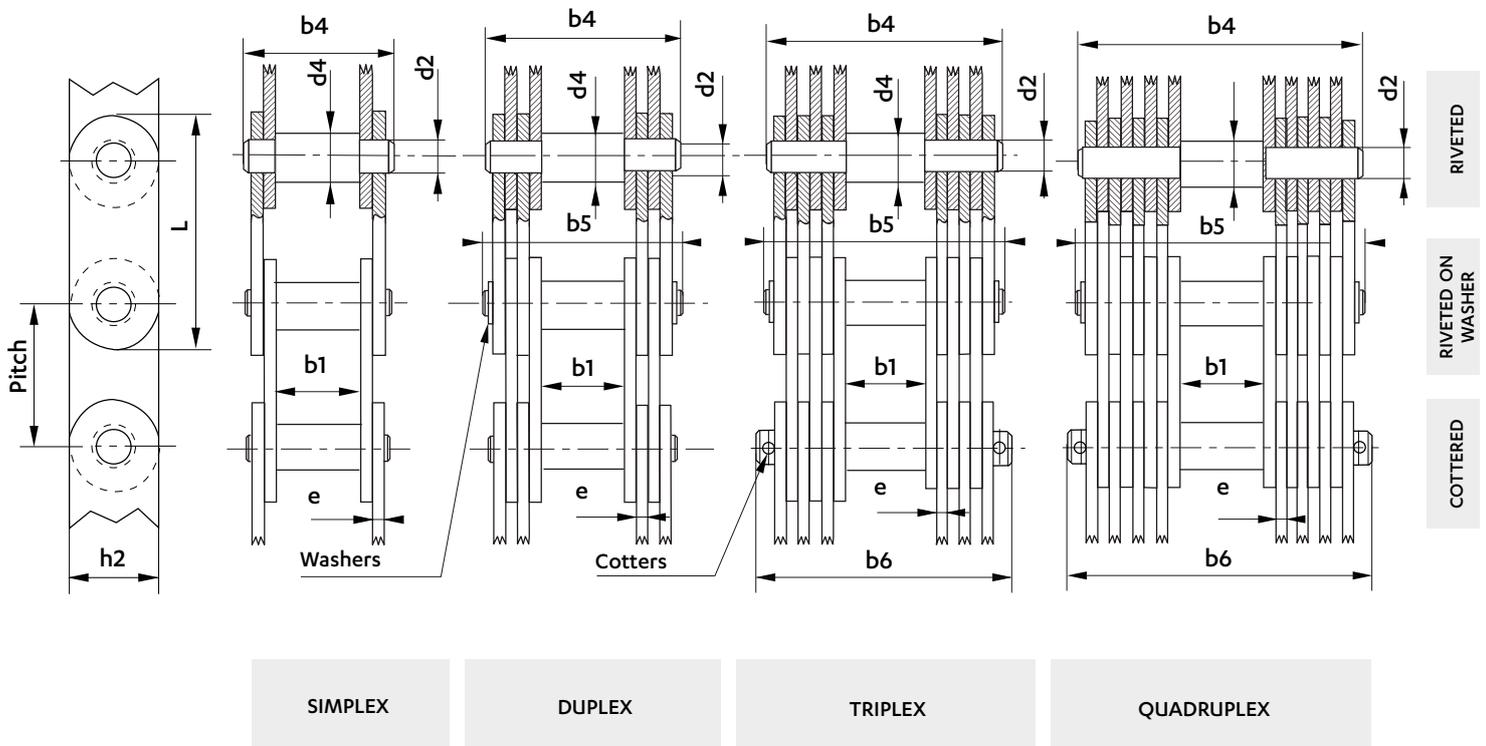

Chain ref	Pitch P	BEARING PINS						PLATES			Minimum breaking load kN	Working surface mm ²	Weight kg/m
		Diameter d4	Width between inner plates b1	Holding Ø d2	over riveted pins b4	WIDTH over riveted pins with washer b5	Over cottered pins b6	Width h2	Thickness e	Length L			
SIMPLEX													
27	21	8	15	6,7	32	-	-	16,5	3	39,5	15	39	1,62
DUPLEX													
28	23	9	16	7,4	39	41	-	19,0	2	44,0	25	59	2,45
29	28	10	18	7,9	42	44	-	23,0	2	54,0	35	63	3,05
30	32	12	21	9,9	53	57	-	25,0	3	62,5	50	118	4,77
31	38	14	24	11,6	56	60	-	31,8	3	73,3	60	136	6,66
TRIPLEX													
32	41	17	28	13,8	73	79	83	34,0	3	79,0	100	250	9,69
33	44	19	32	15,8	90	96	99	36,0	4	86,0	160	380	13,75
34	51	20	35	16,8	94	103	104	42,0	4	100,0	150	400	17,51
35	66	23	40	19,5	100	108	110	55,0	4	129,0	225	460	20,75
QUADRUPLEX													
36	71	28	45	23,0	124	129	133	60,0	4	140,0	300	725	30,00
38	86	34	55	29,8	150	161	165	75,0	5	168,0	450	1200	48,74
39	100	40	65	35,6	178	185	200	85,0	6	198,0	650	1700	60,10
41	130	50	80	44,0	228	241	245	108,0	8	252,0	950	2800	108,00