



ISO STANDARD CHAINS 1977 - **M20**

Dimensions in mm

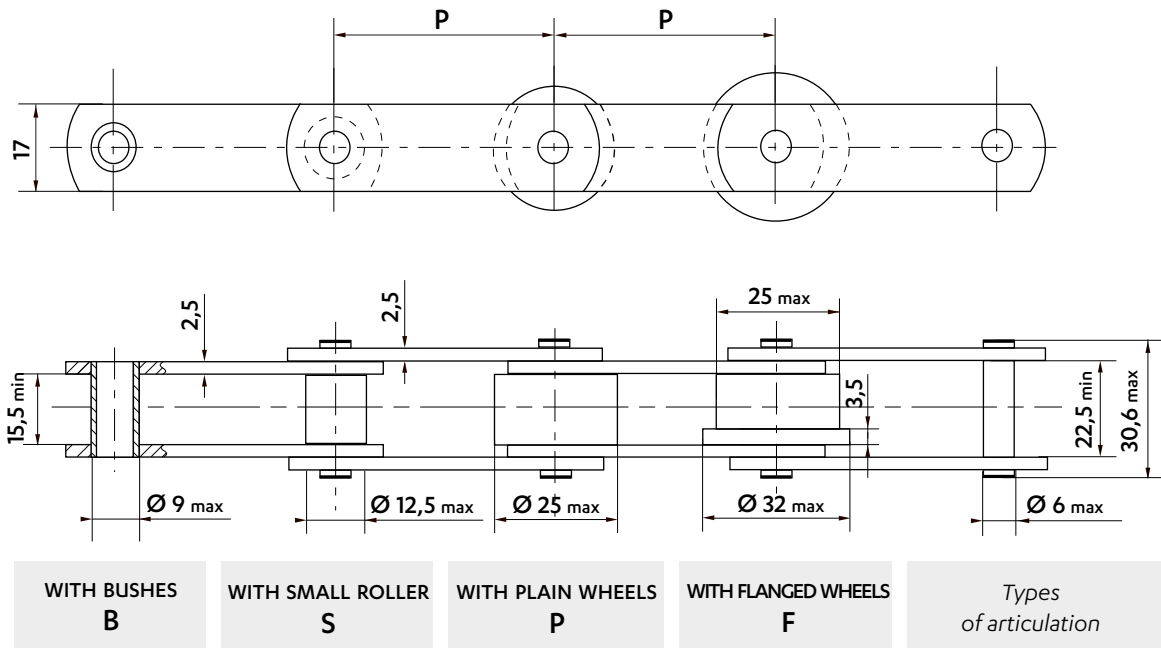

Wheels in different materials can be supplied.

K ATTACHMENTS - BENT PLATES

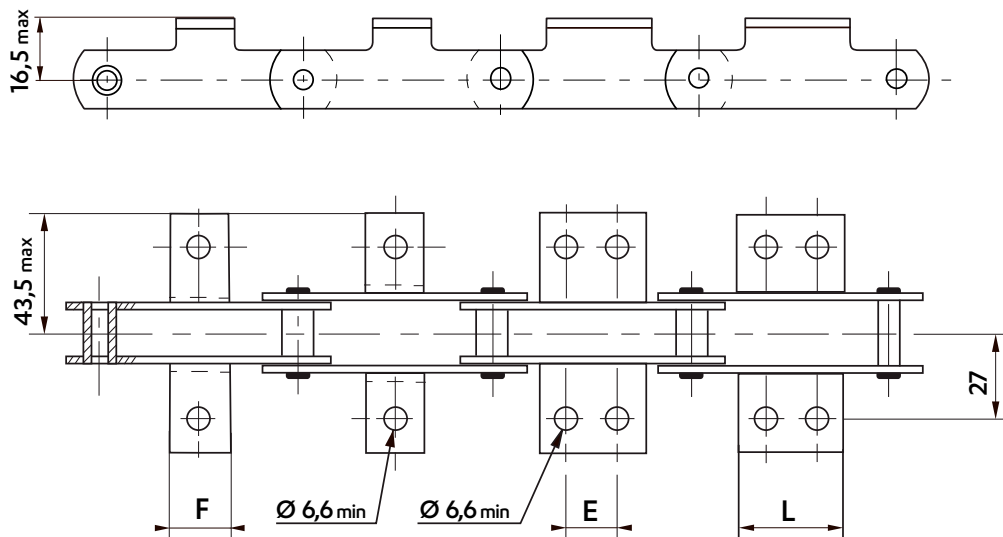


Frequency of attachments on request : on one or both sides of the chain, on inner and/or outer links

Pitch	Attachment dimensions (mm)								Weight of the chain (Kg/m)				Weight of the attachment (Kg/piece)			
	K1 F	K2C E	K2M L		K2L E L		Bush (B)	Roller (S)	Plain wheel (P)	Flanged wheel (F)	K1	K2C	K2M	K2L		
50	23	-	-	-	-	-	-	1,2	1,3	2,2	2,4					
63	36	20	36	-	-	-	-	1,1	1,2	1,9	2,0					
80	53	20	53	35	53	-	-	1,0	1,1	1,6	1,7	0,02	0,04	0,06	0,07	
100	73	20	73	35	73	50	73	0,9	1,0	1,4	1,5					
125	98	20	98	35	98	50	98	0,9	1,0	1,3	1,4					
160	133	20	133	35	133	50	133	0,8	0,9	1,2	1,3					

Intermediate pitches are on request

Dimensions in mm

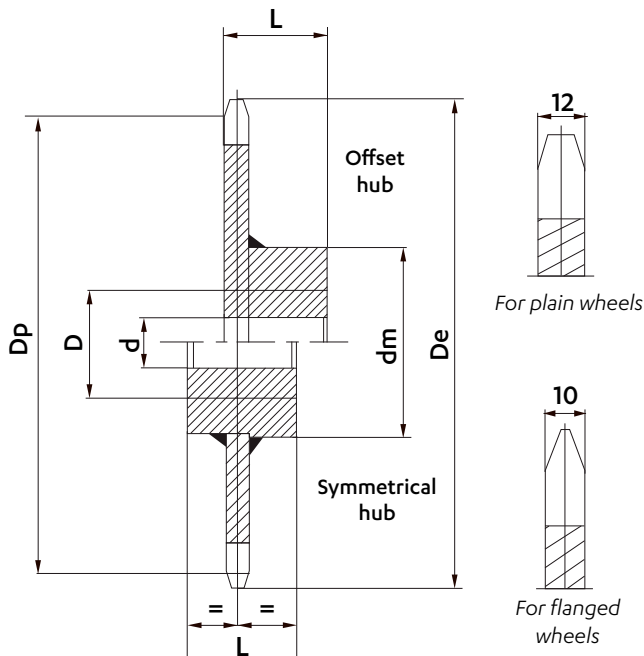STANDARD CHAIN WHEELS


Sedis wheels are supplied made of machine-welded steel or of cast iron in some cases. Teeth are raw casting or flame-cut, or machined for bush chains. Wheels can be supplied bored and keyed. For wheels with offset hub, the keydrive is placed at the same side as the teeth, unless specified otherwise.


We can make on request:

- wheels with machined teeth
- wheels with a different number of teeth
- special wheels

Pitch	Number of teeth	Dimensions (mm)					L	Weight (kg/p)
		D_p	D_e	d	D	D_m		
50	8	130,65	136	24	50	80	50	3
	10	161,80	168	24	50	80	50	3
	12	193,18	200	24	50	80	50	4
	16	256,29	266	24	60	90	60	5
63	8	164,62	172	24	50	80	50	3
	10	203,87	210	24	50	80	50	4
	12	243,41	253	24	50	80	60	5
	16	322,93	332	24	60	90	70	8
80	8	209,04	214	24	50	80	50	5
	10	258,88	268	24	60	90	60	6
	12	309,09	318	24	60	90	70	7
	16	410,06	420	24	70	100	80	12
100	8	261,31	270	24	60	90	70	6
	10	323,61	334	24	60	90	70	8
	12	386,37	396	24	70	100	80	9
	16	512,58	524	24	70	100	80	14

CONNECTING LINKS

REF N° 208
Cottered connecting link

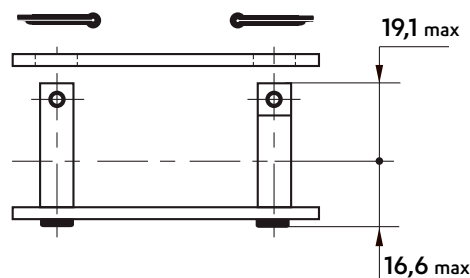
DRILLED PLATES

On outer and inner plates

1 HOLE

